

### Technical data:

Lamp wattage (nominal value):	20 W
Lamp voltage:	12 V
Beam angle:	36°
Luminous intensity:	510 cd
Colour temperature:	2900 K
Chromaticity coordinate x:	0.444
Chromaticity coordinate y:	0.406
Colour rendering:	100
Average life (nominal value):	3500 h
Diameter:	50,7 mm
Length L:	45,2 mm max.
Reflectorcolor:	black
Reflectorcoating:	aluminised
Filament:	c-8
Base:	GU5.3
Reliable burning position:	u360
Packing unit (pcs.):	50
For open fixtures:	Yes
Closed:	Yes
Dimmable:	Yes
UV-P:	Yes
ANSI code:	BAB/CG
ILCOS:	HAGS/C/black-20-12-GU5.3-51/36





### Advantages:

- Coloured accents due to decorative coating
- Reflector with aluminium coating
- reduced heat radiation to the rear of the lamp
- No stray light to the rear
- Superline designer reflector
- Integrated, flush fitting cover lens
- Dimmable
- UV protection (UV-P)

### Application:

Application in design-oriented areas, e.g.:

- Offices and business premises
- Restaurants
- Museums and galleries
- Shop windows
- Showcases
- Private areas

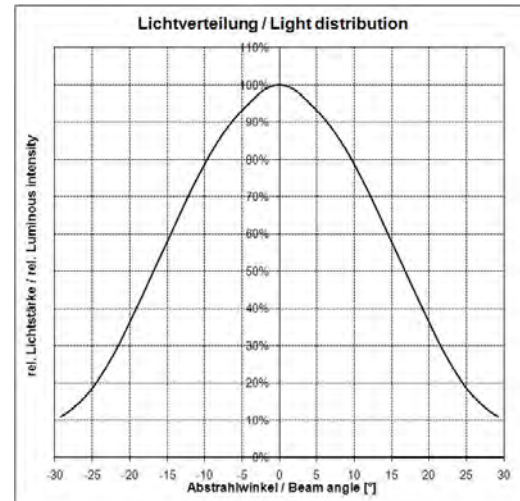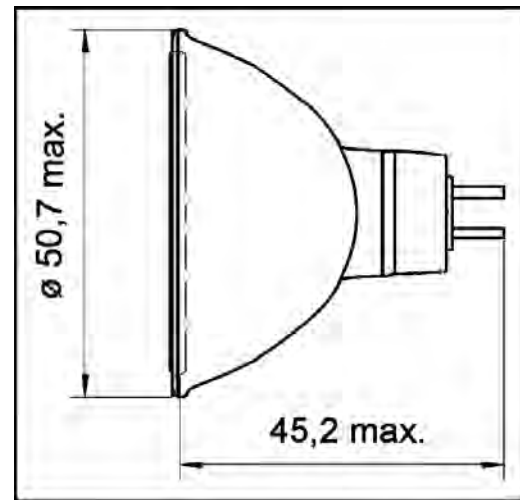

Ø [m]	H [m]	E [lx]
0,65	1	510
1,30	2	128
1,95	3	57
2,60	4	32

Within the scope of the corresponding standards, variations of the declared values and tolerances might occur without prior notice.

### Technical data:

Lamp wattage (nominal value):	20 W
Lamp voltage:	12 V
Beam angle:	36°
Luminous intensity:	510 cd
Colour temperature:	2900 K
Chromaticity coordinate x:	0.444
Chromaticity coordinate y:	0.406
Colour rendering:	100
Average life (nominal value):	3500 h
Diameter:	50,7 mm
Length L:	45,2 mm max.
Reflectorcolor:	black
Reflectorcoating:	aluminised
Filament:	c-8
Base:	GU5.3
Reliable burning position:	u360
Packing unit (pcs.):	50
For open fixtures:	Yes
Closed:	Yes
Dimmable:	Yes
UV-P:	Yes
ANSI code:	BAB/CG
ILCOS:	HAGS/C/black-20-12-GU5.3-51/36





### Advantages:

- Coloured accents due to decorative coating
- Reflector with aluminium coating
- reduced heat radiation to the rear of the lamp
- No stray light to the rear
- Superline designer reflector
- Integrated, flush fitting cover lens
- Dimmable
- UV protection (UV-P)

### Application:

Application in design-oriented areas, e.g.:

- Offices and business premises
- Restaurants
- Museums and galleries
- Shop windows
- Showcases
- Private areas

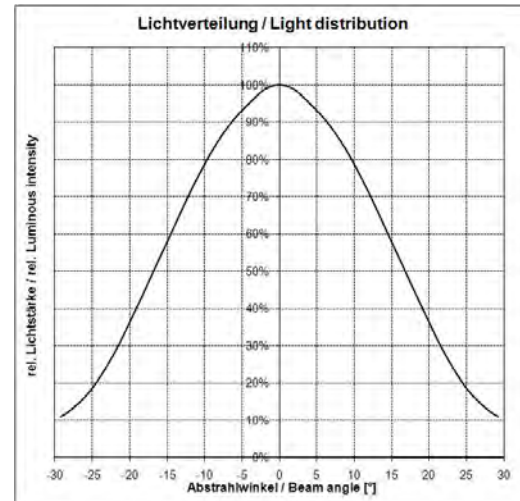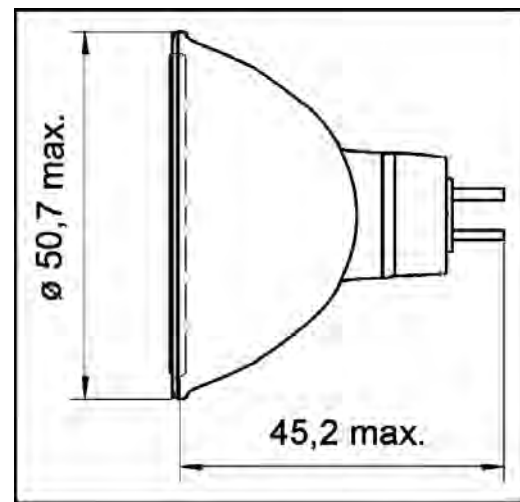

Ø [m]	H [m]	E [lx]
0,65	1	510
1,30	2	128
1,95	3	57
2,60	4	32