


Benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Long service life time¹
- OSRAM System+ Guarantee LUMILUX® with OSRAM QUICKTRONIC® ECG
- Environmental friendly

Product Features

- Improved average lamp life: up to 20.000 h (with QUICKTRONIC®)
- Good color rendering index 1B (R_a 80...89)
- Improved lumen maintenance
- Dimmable from 3...100%
- For operation on electronic control gear (ECG)
- Available light colors: Cool Daylight (865), Cool White (840), White (835), Warm White (830), Extra Warm White (827)

Dimensions

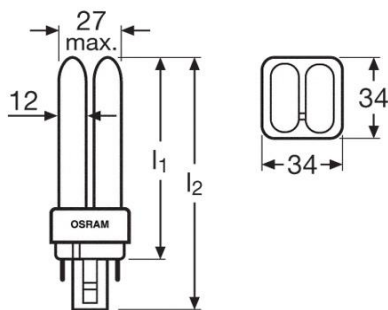

Description	Base	Max Length L1 [mm]	Max Length L1 IEC [mm]	Max Length L2 [mm]
DULUX® D/E 10 W	G24q-1	87	95	103
DULUX® D/E 13 W	G24q-1	115	130	131
DULUX® D/E 18 W	G24q-2	130	140	146
DULUX® D/E 26 W	G24q-3	149	160	165